

HDW15F1S1 Silver

HDW15F1B1 Black

# Freestanding Dishwasher, 15 Place Settings



Height

850 - 895mm

Width

597mm

Depth

599mm

Weight (Packaged)

53kg

Weight (Product)

46kg

## FEATURES

- Designed to match Haier refrigerator models for a consistent kitchen look
- With 15 place settings and can fit plate sizes up to 320mm
- ThermoDry system designed to deliver better drying
- Six wash cycles including Auto, 60 Min, Eco and Glass
- Four wash modifiers including +Dry, Sanitise, Half Load and Intensive
- 3.5 star energy rating and 5 star water rating\*
- Flexible racking with a height-adjustable upper basket, foldable cup racks
- Quiet enough to run at any time of day, with a 49dBa noise rating\*\*
- Soft-touch controls with LED display, delay start and key lock options

## ACCESSORIES

Cutlery basket

Drain hose support

Inlet hose


\* Energy and water ratings subject to change. Final certification pending.

\*\* Noise rating subject to change.

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [haier.com](http://haier.com)


# Product overview

## PRODUCT DIMENSIONS

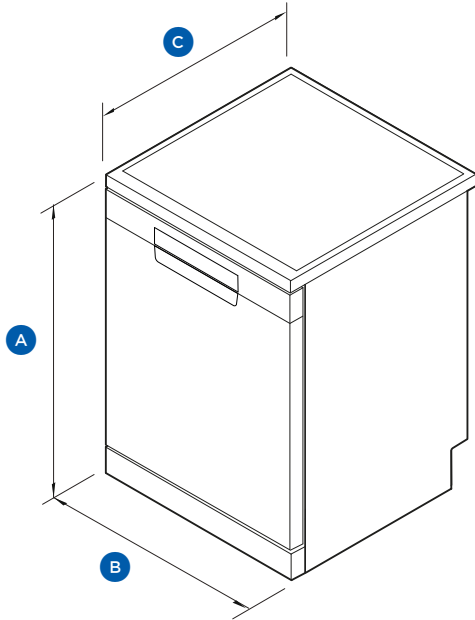

		mm
<b>A</b>	Overall height	850 - 895
<b>B</b>	Overall width	597
<b>C</b>	Overall depth	599

## CAVITY & SERVICE DIMENSIONS

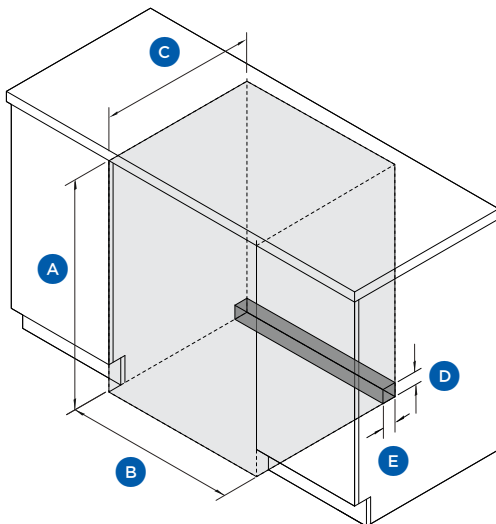

<b>A</b>	Overall height of cavity	820 - 895
<b>B</b>	Overall width of cavity	600
<b>C</b>	Minimum depth of cavity	600
<b>D</b>	Height of rear plumbing and electrical clearance	100 - 145*
<b>E</b>	Depth of rear plumbing and electrical clearance	60

\*depending on feet height

## SERVICES

Supply	220-240V, 50Hz, 10A
Plumbing	3/4 BSP (20mm) connector water inlet hose Min. 34.5kPa, max 1034kPa Cold water connection 22C

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [haier.com](http://haier.com)