

HWD9060MW1

## 9kg + 6kg 500 Series & Combi Front Loader Washer Dryer

Haier



HWD9060MW1

Height

850mm

Width

595mm

Depth

559mm

Weight (Packaged)

77kg

Weight (Product)

71kg

### FEATURES

- Wash and dry in one appliance for everyday convenience and fabric care
- 9kg wash and 6kg dry capacity suits small to medium households
- Stain Treatment helps break down cooking oils for a more effective clean
- Dual spray nozzles rinse away foam and residue to keep washer fresh
- Steam Refresh smooths creases and reduces odours between washes
- Deodorise cycle helps remove everyday smells from lightly worn clothes
- Woolmark Black certified wash cycle gently cares for delicate wool fabrics
- Antibacterial treated gasket helps maintain a cleaner, more hygienic washer

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [haier.com](http://haier.com)

HWD1060NW1

# 10kg + 6kg 600 Series Combi Front Loader Washer Dryer

Haier



HWD1060NW1

Height

850mm

Width

595mm

Depth

559mm

Weight (Packaged)

77kg

Weight (Product)

71kg


## FEATURES

- Wash and dry in one appliance for everyday convenience and fabric care
- 10kg wash and 6kg dry capacity suits medium to larger households
- Stain Treatment helps break down cooking oils for a more effective clean
- Dual spray nozzles rinse away foam and residue to keep washer fresh
- Auto Dose dispenses the right detergent each load, reducing waste and improving results
- Steam Refresh smooths creases and reduces odours between washes
- UV hygiene option uses light to help eliminate bacteria for added peace of mind
- Woolmark Black certified wash cycle gently cares for delicate wool fabrics

The models shown in this Specification Guide (SG) may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This SG should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [haier.com](http://haier.com)


# Product Overview

## PRODUCT DIMENSIONS

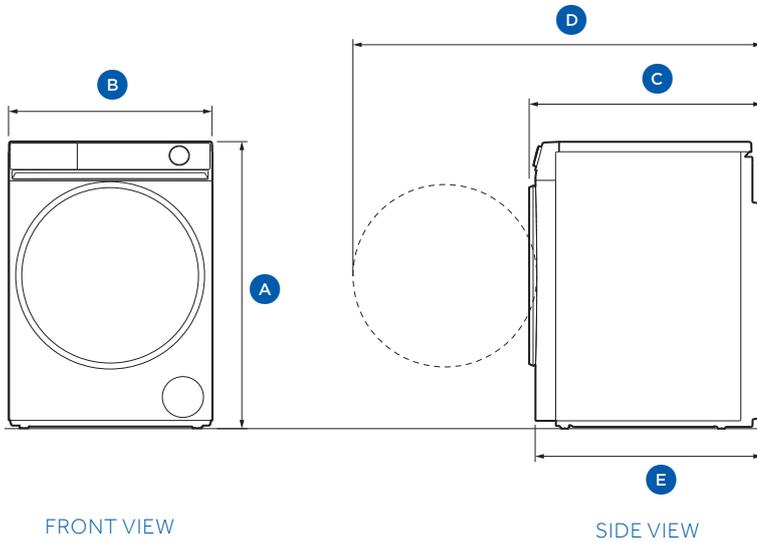

		mm
<b>A</b>	Overall height	850 - 865
<b>B</b>	Overall width	595
<b>C</b>	Overall depth (door closed)	559
<b>D</b>	Overall depth (door open)	1062
<b>E</b>	Overall depth (excluding door)	534


## CAVITY DIMENSIONS

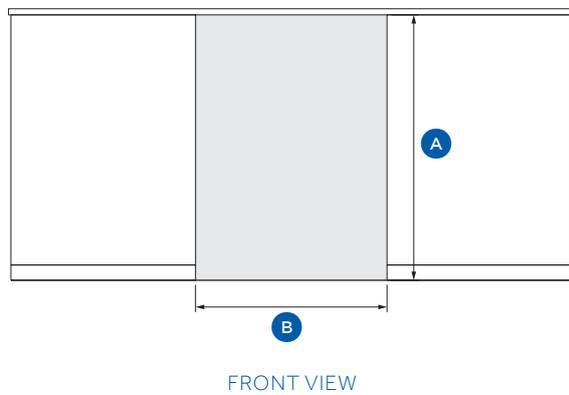

		mm
<b>A</b>	Minimum height of cavity	865
<b>B</b>	Minimum width of cavity	625
<b>C</b>	Minimum clearance at back of cavity	30
<b>D</b>	Minimum depth of cavity (excluding product door)	564
<b>E</b>	Minimum clearance at front of cavity for in cupboard	30
<b>F</b>	Minimum depth of cavity in cupboard	619

Note: If installing behind a cabinetry door, it must be hinged on the same side as the washing machine. There must be a minimum clearance of 30mm from the front of the washing machine door to the internal face of the cabinetry door for the product to operate safely.

The enclosed space must be provided with sufficient ventilation to meet local building code requirements or the door must be open while the product is operating.

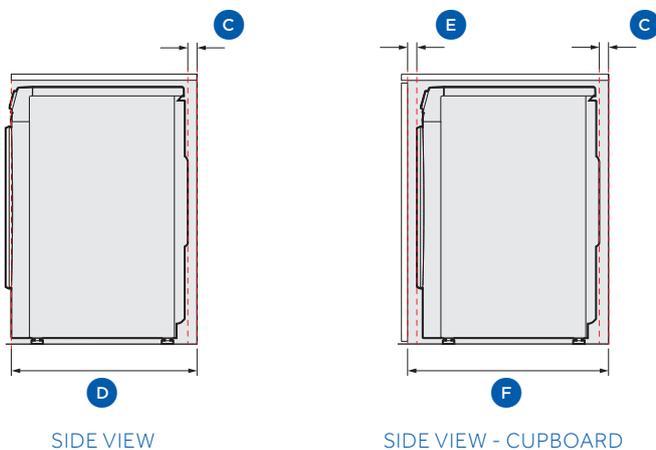

## SERVICES

- Supply 220-240 V, 50 Hz
- Service 10 A
- Connection Flex cord with plug